

09 6800 TUFTED CARPET


SHAW INDUSTRIES

Mosaic

- Maintenance

step by step

- 1 selection
- 2 planning
- 3 cleaning
- 4 spots & spills

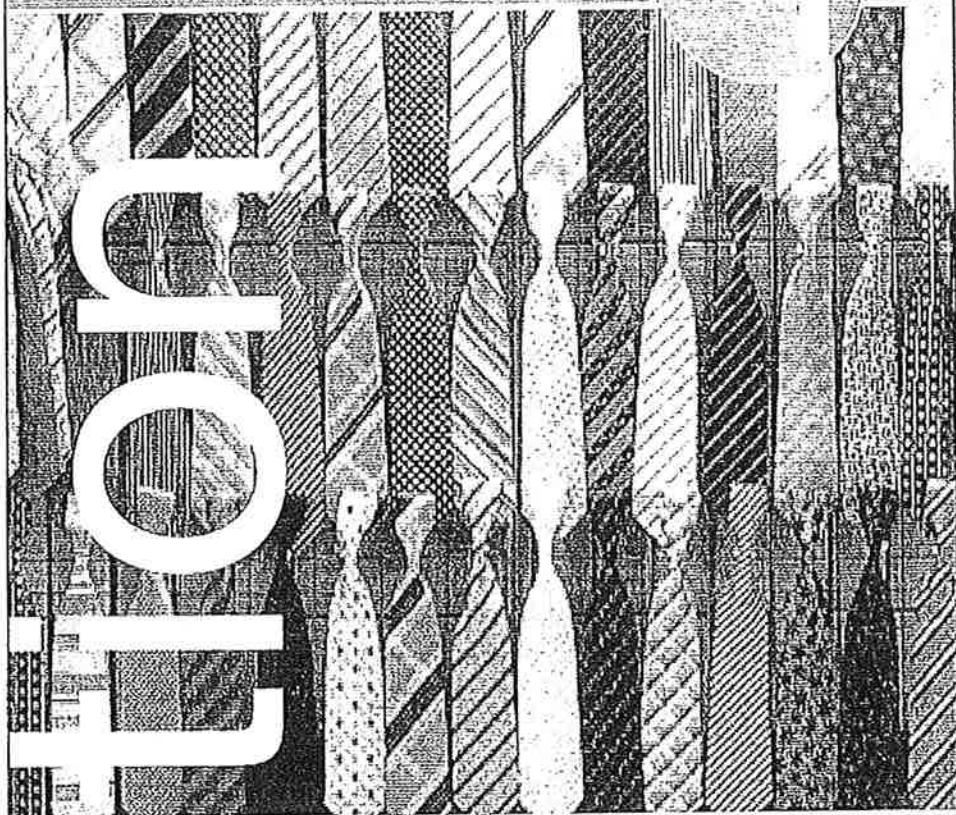

Services

The starting point of a successful maintenance program is selecting a vendor that meets your specific performance requirements. No single factor alone is sufficient. No doubt, there are several variables that should be considered (see sidebar, p. 14).

Overall, it's important to understand that the performance requirements of the job must reflect the performance needs of the space. Your Shaw Contract Group sales representative will help guide you in selecting the best product for your environment.

Additionally, the warranty of the product should ensure that your investment is protected. The manufacturer should maintain accountability for the entire carpet system, from the engineering of the backing, all the way to the actual carpet construction.

FIND YOUR AGENT

shawcontractgroup.com/maintenance




selection

CARPET SELECTION FACTORS:

- o Fiber type: The most common carpet fibers include nylon, polypropylene, polyester and wool. While each can be appropriate for certain applications, the performance characteristics of nylon make it the most common fiber type for commercial applications.
- o Fiber construction: Variables of fiber construction as it relates to nylon include yarn processing methods, tensile strength and denier (size of yarn). Typically, larger yarn and greater tensile strength yield better performance.
- o Dye type. Dye type refers to how color is added to the yarn. Solution dyed products may be aggressively cleaned to remove stains without damage to color, while yarn dyeing provides more color variance to hide soiling.
- o Color and pattern: The choice of color and pattern goes beyond aesthetic considerations and has a major impact on appearance retention. Darker colors and those similar to the soil common in the region, as well as multi-colored or patterned carpet, will help hide soiling.
- o Backing type: Backings provide a variety of performance attributes, including pattern match abilities, protection against delamination and edge ravel, superior tuft bind strength, moisture protection, antimicrobial properties and cushioning. Typically, performance backings with attributes appropriate to the facility's intended use are easier to maintain, provide long-term appearance retention, and offer more comprehensive warranties.
- o Installation: Just as important as selecting the right carpet is choosing qualified installers who are trained in installation methods and equipment, adhesives, floor prep, backings, and seaming methods for your product. Proper installation will ensure the performance of your carpet.
- o Maintenance: Maintenance is critical for optimum performance. Preventative maintenance, adhering to a well-planned maintenance schedule and responding quickly to any unforeseen maintenance issues are crucial in protecting your carpet investment.

step 2

Planning Maintenance

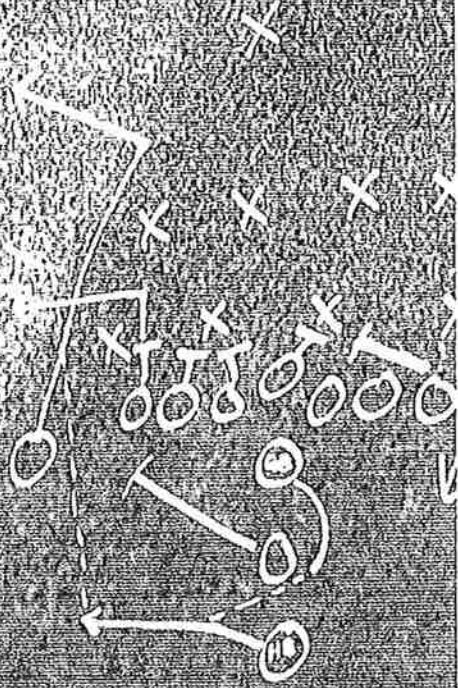


Planning for Performance

The carpet maintenance program should be considered part of the buying decision. If proper maintenance is neglected, the carpet appearance will suffer, shortening its useful life and increasing long-term costs. Preventive maintenance and developing a maintenance schedule are the two primary ingredients of performance planning. See the reverse side for guidelines on both.

FOR MORE PLANNING INFORMATION:

shawcontractgroup.com/maintenance



o Preventative maintenance: Prevent soil from entering and spreading throughout the building to prolong the life of your carpet and reduce overall maintenance needs. Industry estimates show that removing one pound of soil can cost more than \$800, however the measures below control soil before it enters the space:


Keep outside areas clean: By maintaining a clean exterior, dirt coming in the building will be minimized. Be sure to keep sidewalks and garages clear of dirt and debris.

Use walk-off tiles at entrances: Walk-off tiles should be placed at exterior entrances, as well as in transition areas from hard surface to carpet. Use a coarse texture tile designed to brush soil from shoes in conjunction with a water absorbent tile designed to trap moisture.

o Developing a maintenance schedule: Carpet maintenance must be established as a scheduled program, rather than a random series of infrequent cleanings and reactions to soiling conditions. Tailor the design of the program to the amount of traffic and type of soiling, both of which vary by area.

Identify traffic patterns: Assess the building layout, traffic flow and activities held within various areas to identify traffic patterns within the building. Generally, private offices will have light traffic; corridors, conference rooms and classrooms will have medium traffic; and entrances, main hallways and workrooms will have heavy traffic. Airports and entries to public spaces such as hospitals, malls and theaters are considered severe conditions.

Establish a plan: The frequency and method of cleaning should be based on the guidelines on the following page.

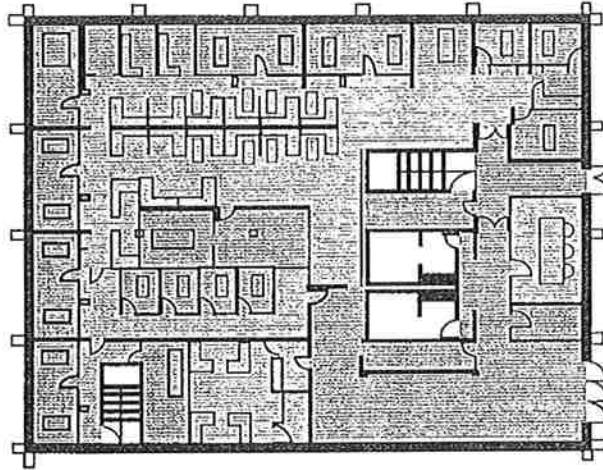


light traffic=green medium traffic=blue heavy traffic=brown

suggested frequencies by traffic levels:

TRAFFIC LEVEL	VACUUM	SPOT REMOVAL	HOT WATER EXTRACTION
light -private offices -cubicles	2+ times per week	as needed	1 time per year
medium -shared offices -interior hallways -conference rooms -classrooms	1+ times per day	as needed	2 times per year
heavy -general entrances -elevators -main hallways -breakrooms -workrooms -mail rooms -patient rooms -waiting rooms	1+ times per day	as needed	4 times per year
severe -general entrances in severe climates -cafeterias -hospital entries -(extra heavy traffic and soiling require frequent attention)	1+ times per day	as needed	12+ times per year

step

3

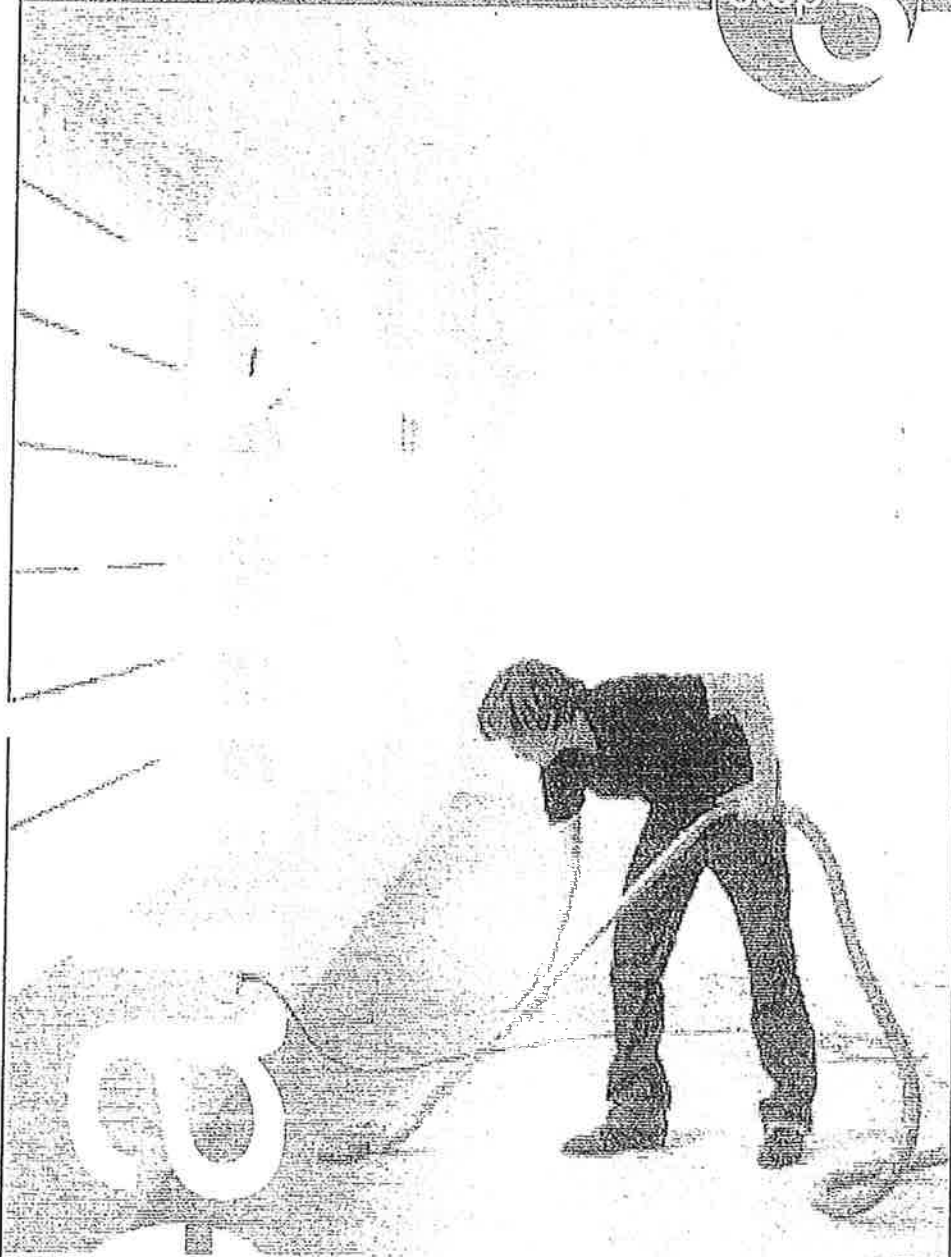

3

3

3

With an appropriate maintenance program in place, the next step is to follow it. An explanation of recommended cleaning methods, and guidelines for each, are listed on the reverse side.

FOR MORE CLEANING INFORMATION

shawcontractgroup.com/maintenance



o **Vacuum:** Vacuuming is the most important element in the maintenance of carpet and overall appearance of the facility. Vacuums are designed to remove dry soil, which accounts for 85 percent of soil tracked into a building. Frequent usage captures dirt at the surface before it settles and becomes more difficult to remove. A quality vacuum is vital to prolonging the life of your carpet. When selecting a vacuum, be sure it is certified by the Carpet and Rug Institute (CRI) Vacuum Cleaning Indoor Air Quality Program (www.carpet-rug.org).

o **Interim cleaning:** Interim cleaning may be conducted between extractions to reduce the total number of extractions and renew carpet appearance.


- **Low moisture encapsulation:** Low moisture encapsulation systems efficiently improve carpet appearance with limited down time for cleaning and drying. The cleaning agent R2Xtra, or another encapsulating cleaner certified by the Carpet and Rug Institute (CRI) Seal of Approval Program, is applied and mechanically agitated into the carpet pile, allowed to dry, then vacuumed to remove the encapsulated soil. In conjunction with scheduled hot water extraction, the low moisture method helps maintain premium carpet appearance.
- **Other interim systems:** Other methods, such as the Bonnet, provide merely a temporary appearance enhancement because they only absorb at the surface and provide no extraction of deep soil. A spinning bonnet also may damage the pile. Shaw does not recommend the Bonnet method.

o **Hot water extraction:** Hot water extraction cleans the oily materials that vacuums can't remove, which accounts for 15 percent of all soil. The frequency of hot water extraction should be defined by the maintenance schedule. If the carpet looks dull or dirty between cleanings the frequency should be increased. Proximity to areas with a high content of oily soil may require more frequent hot water extractions.

- **Steps to follow:**
 1. Thoroughly vacuum all carpet.
 2. Apply a traffic lane cleaner such as R2Xtra, or another cleaner certified by the CRI Seal of Approval Program (www.carpet-rug.org).
 3. Agitate carpet to allow cleaner to penetrate. Allow 10 min. dwell time.
 4. Extract with an extraction unit that can apply rinse water at a rate greater than one gallon per minute, with sufficient recovery power to avoid overwetting the carpet. Do not use extraction machines that recycle the water.
 5. Use fans or air movers to decrease drying times.
- **Do not use cleaning agents containing optical brighteners or silicon-based anti-soil treatments.**
- **Self-contained, walk-behind machines that apply a cleaning solution at a rate balanced with the recovery capability of the machine do not perform as well as a high-performance extractor. These machines should be used as an interim method, supplemented by periodic high-performance cleaning.**

step 4

spots & spills

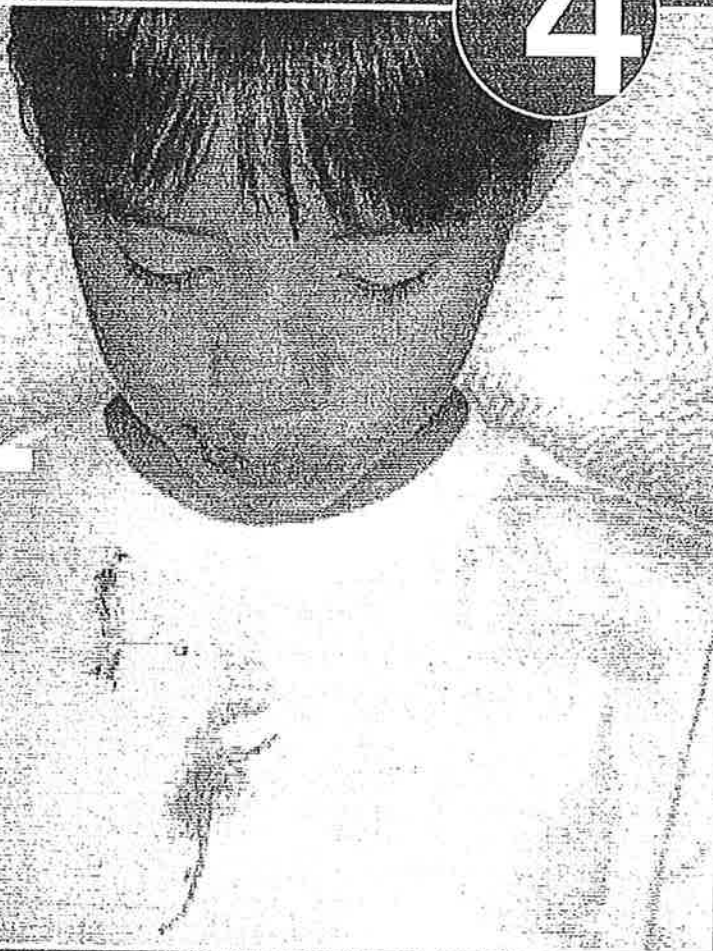

spots

Unlike planned maintenance, spot and spill removal is the reaction to an unplanned incident and should *always involve immediate action*. In general, solids should be gently removed and liquids blotted with a white towel, working from the outer edge of the spill toward the center. Next, apply R2Xtra or another spotter certified by the CRI Seal of Approval Program to the stained area. Agitate with a soft bristle brush (do not scrub) and allow solution to dwell on the carpet for a minimum of 10 minutes. When dry, remove by vacuuming. Wet stains, severe stains, or bodily fluids should be removed by a portable extractor. If this does not fully remove the stain, contact a professional cleaner or follow the recommendations on the attached chart.

FOR MORE SPOT & SPILL INFORMATION:

shawcontractgroup.com/maintenance



spot & spill removal

Adhesive: Carpet	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Alcoholic Beverages	Clean with R2Xtra or another general purpose cleaner.
Asphalt	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Betadine	Clean with a sodium thiosulfate solution or streepene solution for solution dyed carpet. Follow with R2Xtra or another general purpose cleaner.
Blood	Clean with R2Xtra or another general purpose cleaner. If blood is dry, an ammonia solution may be used.
Butter	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chewing Gum	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chocolate	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.
Coffee	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Cola	Clean with R2Xtra or another general purpose cleaner.
Cosmetics	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Crayon	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Deicer, Salt	Vacuum and blot. Then clean with R2Xtra or another general purpose cleaner.
Excrement	Blot and clean with R2Xtra or another general purpose cleaner.
Food	Clean with R2Xtra or another general purpose cleaner.
Furniture Polish	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.



4 spot & spill removal

[continued]

Grease	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Ink <ul style="list-style-type: none">• Ballpoint• Permanent• Washable	<ul style="list-style-type: none">• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.• Clean with R2Xtra or another general purpose cleaner.
Lipstick	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Milk	Clean with R2Xtra or another general purpose cleaner.
Mustard	Clean with R2Xtra or another general purpose cleaner.
Nail Polish	Clean with polish remover. Follow with R2Xtra or another general purpose cleaner.
Paint: <ul style="list-style-type: none">• Latex, Wet• Latex, Dry	<ul style="list-style-type: none">• Clean with R2Xtra or another general purpose cleaner.• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Rust	Contact a professional.
Tea	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Toner: Copier	Vacuum, then clean with R2Xtra or another general purpose spot cleaner.
Unknown	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Urine or Vomit	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Wax	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Wine	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.

step 4 solutions

General purpose spotter	1/2 teaspoon of clear dishwashing detergent per one quart of water.
Vinegar solution	One part vinegar to one part water.
Ammonia solution	One tablespoon ammonia to one cup of water.
Solvent for grease	NEVER APPLY DIRECTLY TO CARPET. Apply solvent cleaner to towel and then remove spot from carpet.

shaw contract group

www.shawcontractgroup.com

© 2005 Shaw, a Berkshire Hathaway Company
Printed on 100% recycled paper with soy ink.





09 6800 TUFTED CARPET

SHAW INDUSTRIES

Man Made Stria

- Maintenance

step by step

1



selection

2



planning

3




cleaning

4



spots & spills

Shaw Contracting

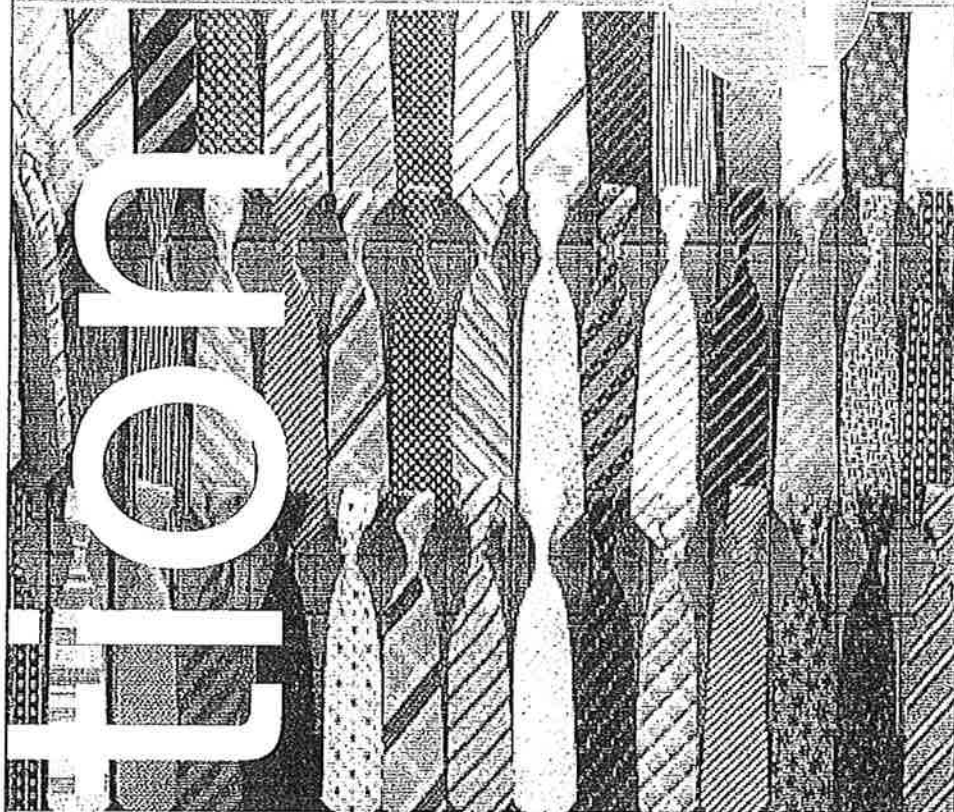

Shaw Contract Flooring Solutions

The starting point for a successful flooring project is a certain level of product placement based on your specific performance requirements. No single product fits all performance needs, therefore several qualified products should be considered (see reverse side).

Every floor application is unique and requires performance requirements of the product must reflect the performance needs of the space. You, Shaw Contract Group, will guide you and allow you to select the best product for your environment.

Additionally, the warranty on the product should ensure that your investment is protected. The manufacturer should maintain accountability for the entire flooring system from the engineering of the backing/substrate to the actual carpet construction.

FINISH YOUR FLOOR

shawcontractgroup.com/insiderinfo




selection

CARPET SELECTION FACTORS:

- o **Fiber type:** The most common carpet fibers include nylon, polypropylene, polyester and wool. While each can be appropriate for certain applications, the performance characteristics of nylon make it the most common fiber type for commercial applications.
- o **Fiber construction:** Variables of fiber construction as it relates to nylon include yarn processing methods, tensile strength and denier (size of yarn). Typically, larger yarn and greater tensile strength yield better performance.
- o **Dye type:** Dye type refers to how color is added to the yarn. Solution dyed products may be aggressively cleaned to remove stains without damage to color, while yarn dyeing provides more color variance to hide soiling.
- o **Color and pattern:** The choice of color and pattern goes beyond aesthetic considerations and has a major impact on appearance retention. Darker colors and those similar to the soil common in the region, as well as multi-colored or patterned carpet, will help hide soiling.
- o **Backing type:** Backings provide a variety of performance attributes, including pattern match abilities, protection against delamination and edge ravel, superior tuft bind strength, moisture protection, antimicrobial properties and cushioning. Typically, performance backings with attributes appropriate to the facility's intended use are easier to maintain, provide long-term appearance retention, and offer more comprehensive warranties.
- o **Installation:** Just as important as selecting the right carpet is choosing qualified installers who are trained in installation methods and equipment, adhesives, floor prep, backings, and seaming methods for your product. Proper installation will ensure the performance of your carpet.
- o **Maintenance:** Maintenance is critical for optimum performance. Preventative maintenance, adhering to a well-planned maintenance schedule and responding quickly to any unforeseen maintenance issues are crucial in protecting your carpet investment.

step **2**

planning

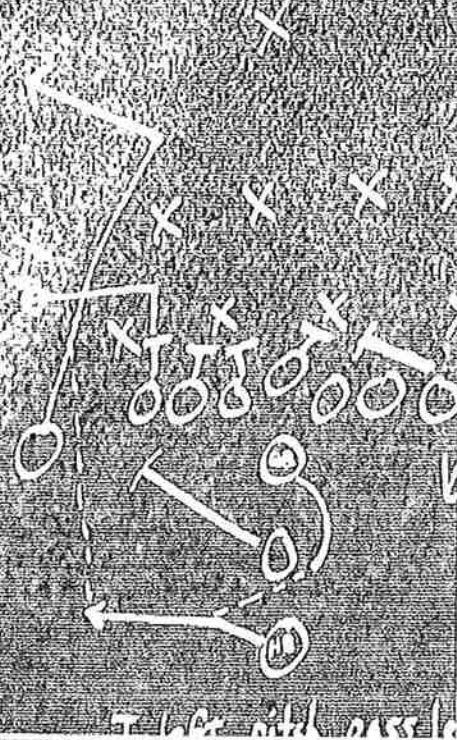


Planning for Performance

The carpet maintenance program should be considered part of the buying decision. If proper maintenance is neglected, the carpet appearance will suffer, shortening its useful life and increasing long-term costs. Preventative maintenance and developing a maintenance schedule are the two primary ingredients of performance planning. See the reverse side for guidelines on how to...

FOR MORE PLANNING INFORMATION

shawcontractgroup.com/maintenance



o Preventative maintenance: Prevent soil from entering and spreading throughout the building to prolong the life of your carpet and reduce overall maintenance needs. Industry estimates show that removing one pound of soil can cost more than \$800, however the measures below control soil before it enters the space:


Keep outside areas clean: By maintaining a clean exterior, dirt coming in the building will be minimized. Be sure to keep sidewalks and garages clear of dirt and debris.

Use walk-off tiles at entrances: Walk-off tiles should be placed at exterior entrances, as well as in transition areas from hard surface to carpet. Use a coarse texture tile designed to brush soil from shoes in conjunction with a water absorbent tile designed to trap moisture.

o Developing a maintenance schedule: Carpet maintenance must be established as a scheduled program, rather than a random series of infrequent cleanings and reactions to soiling conditions. Tailor the design of the program to the amount of traffic and type of soiling, both of which vary by area.

Identify traffic patterns: Assess the building layout, traffic flow and activities held within various areas to identify traffic patterns within the building. Generally, private offices will have light traffic; corridors, conference rooms and classrooms will have medium traffic; and entrances, main hallways and workrooms will have heavy traffic. Airports and entries to public spaces such as hospitals, malls and theaters are considered severe conditions.

Establish a plan: The frequency and method of cleaning should be based on the guidelines on the following page.

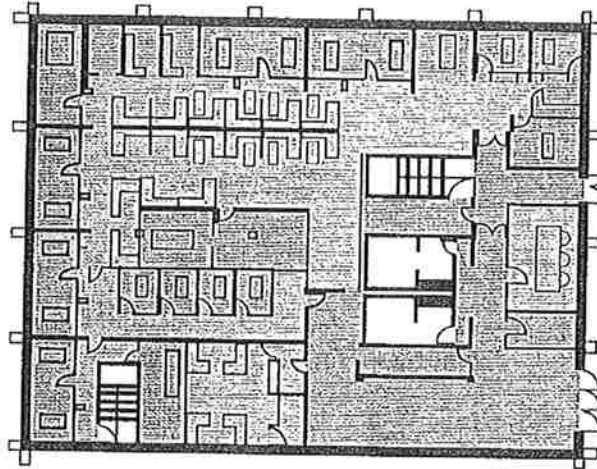


light traffic=green medium traffic=blue heavy traffic=brown

suggested frequencies by traffic levels:

TRAFFIC LEVEL	VACUUM	SPOT REMOVAL	HOT WATER EXTRACTION
light -private offices -cubicles	2+ times per week	as needed	1 time per year
medium -shared offices -interior hallways -conference rooms -classrooms	1+ times per day	as needed	2 times per year
heavy -general entrances -elevators -main hallways -breakrooms -work rooms -mail rooms -patient rooms -waiting rooms	1+ times per day	as needed	4 times per year
severe -general entrances in severe climates -cafeterias -hospital entrys -(extra heavy traffic and soiling require frequent attention)	1+ times per day	as needed	12+ times per year

step 3

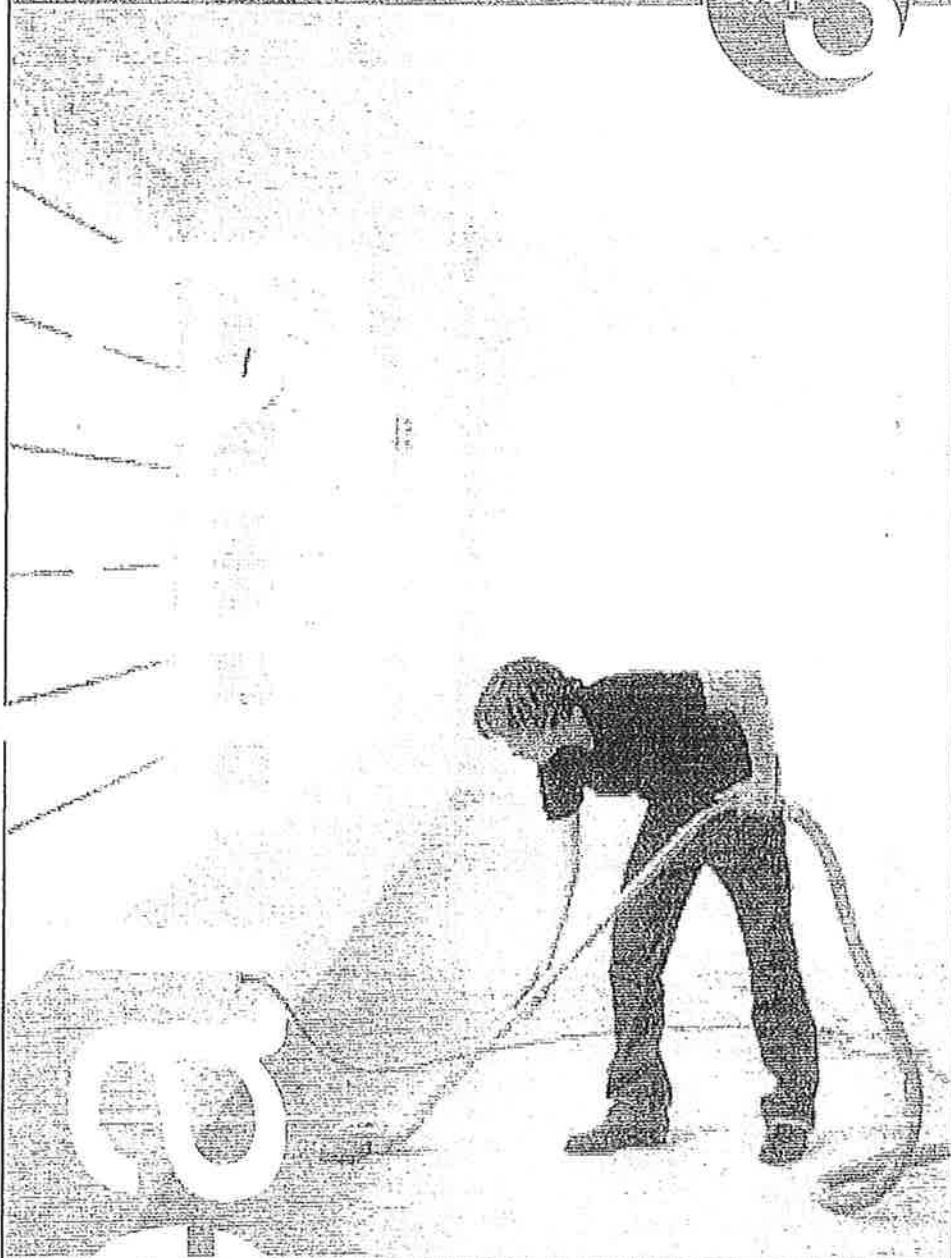

W

E

C

With an appropriate maintenance program in place, the next step is to follow it. An explanation of recommended cleaning methods, and guidelines for each, are listed on the reverse side.

FOR MORE CLEANING INFORMATION

shawcontractgroup.com/maintenance



o **Vacuum:** Vacuuming is the most important element in the maintenance of carpet and overall appearance of the facility. Vacuums are designed to remove dry soil, which accounts for 85 percent of soil tracked into a building. Frequent usage captures dirt at the surface before it settles and becomes more difficult to remove. A quality vacuum is vital to prolonging the life of your carpet. When selecting a vacuum, be sure it is certified by the Carpet and Rug Institute (CRI) Vacuum Cleaning Indoor Air Quality Program (www.carpet-rug.org).

o **Interim cleaning:** Interim cleaning may be conducted between extractions to reduce the total number of extractions and renew carpet appearance.

- **Low moisture encapsulation:** Low moisture encapsulation systems efficiently improve carpet appearance with limited down time for cleaning and drying. The cleaning agent R2Xtra, or another encapsulating cleaner certified by the Carpet and Rug Institute (CRI) Seal of Approval Program, is applied and mechanically agitated into the carpet pile, allowed to dry, then vacuumed to remove the encapsulated soil. In conjunction with scheduled hot water extraction, the low moisture method helps maintain premium carpet appearance.
- **Other interim systems:** Other methods, such as the Bonnet, provide merely a temporary appearance enhancement because they only absorb at the surface and provide no extraction of deep soil. A spinning bonnet also may damage the pile. Shaw does not recommend the Bonnet method.

o **Hot water extraction:** Hot water extraction cleans the oily materials that vacuums can't remove, which accounts for 15 percent of all soil. The frequency of hot water extraction should be defined by the maintenance schedule. If the carpet looks dull or dirty between cleanings the frequency should be increased. Proximity to areas with a high content of oily soil may require more frequent hot water extractions.

- **Steps to follow:**


1. Thoroughly vacuum all carpet.
2. Apply a traffic lane cleaner such as R2Xtra, or another cleaner certified by the CRI Seal of Approval Program (www.carpet-rug.org).
3. Agitate carpet to allow cleaner to penetrate. Allow 10 min. dwell time.
4. Extract with an extraction unit that can apply rinse water at a rate greater than one gallon per minute, with sufficient recovery power to avoid overwetting the carpet. Do not use extraction machines that recycle the water.
5. Use fans or air movers to decrease drying times.

- Do not use cleaning agents containing optical brighteners or silicon-based anti-soil treatments.
- Self-contained, walk-behind machines that apply a cleaning solution at a rate balanced with the recovery capability of the machine do not perform as well as a high-performance extractor. These machines should be used as an interim method, supplemented by periodic high-performance cleaning.

step
4

spots
&
spills

spots

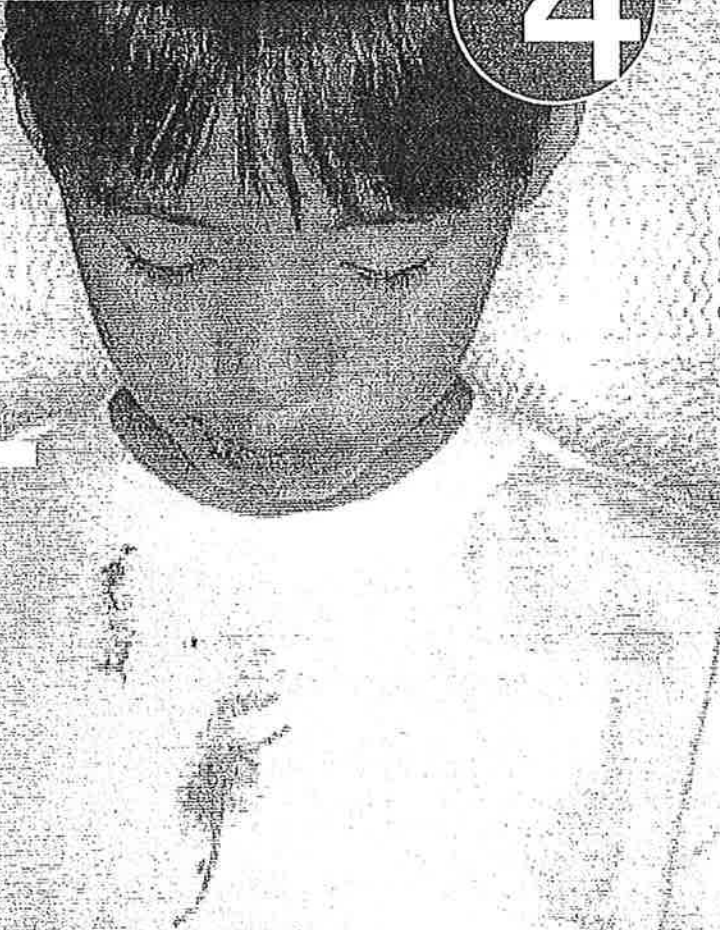

Unlike planned maintenance, spot and spill removal is the reaction to an unplanned incident and should always involve immediate action. In general, solids should be gently removed and liquids blotted with a white towel, working from the outer edge of the spill toward the center. Next, apply R2Xtra or another spotter certified by the CRI Seal of Approval Program to the stained area. Agitate with a soft bristle brush (do not scrub) and allow solution to dwell on the carpet for a minimum of 10 minutes. When dry, remove by vacuuming. Wet stains, severe stains, or bodily fluids should be removed by a portable extractor. If this does not fully remove the stain, contact a professional cleaner or follow the recommendations on the attached chart.

FOR MORE SPOT & SPILL INFORMATION:

shawcontractgroup.com/maintenance



spot & spill removal

Adhesive: Carpet	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Alcoholic Beverages	Clean with R2Xtra or another general purpose cleaner.
Asphalt	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Betadine	Clean with a sodium thiosulfate solution or streepene solution for solution dyed carpet. Follow with R2Xtra or another general purpose cleaner.
Blood	Clean with R2Xtra or another general purpose cleaner. If blood is dry, an ammonia solution may be used.
Butter	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chewing Gum	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chocolate	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.
Coffee	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Cola	Clean with R2Xtra or another general purpose cleaner.
Cosmetics	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Crayon	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Deicer, Salt	Vacuum and blot. Then clean with R2Xtra or another general purpose cleaner.
Excrement	Blot and clean with R2Xtra or another general purpose cleaner.
Food	Clean with R2Xtra or another general purpose cleaner.
Furniture Polish	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.

step 4 spot & spill removal
[continued]

Grease	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Ink	
• Ballpoint	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
• Permanent	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
• Washable	• Clean with R2Xtra or another general purpose cleaner.
Lipstick	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Milk	Clean with R2Xtra or another general purpose cleaner.
Mustard	Clean with R2Xtra or another general purpose cleaner.
Nail Polish	Clean with polish remover. Follow with R2Xtra or another general purpose cleaner.
Paint:	
• Latex, Wet	• Clean with R2Xtra or another general purpose cleaner.
• Latex, Dry	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Rust	Contact a professional.
Tea	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Toner: Copier	Vacuum, then clean with R2Xtra or another general purpose spot cleaner.
Unknown	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Urine or Vomit	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Wax	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Wine	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.

step 4 solutions

General purpose spotter	1/2 teaspoon of clear dishwashing detergent per one quart of water.
Vinegar solution	One part vinegar to one part water.
Ammonia solution	One tablespoon ammonia to one cup of water.
Solvent for grease	NEVER APPLY DIRECTLY TO CARPET. Apply solvent cleaner to towel and then remove spot from carpet.

shaw contract group

www.shawcontractgroup.com

© 2005 Shaw, a Berkshire Hathaway Company
Printed on 100% recycled paper with soy ink.



09 6800 TUFTED CARPET

SHAW INDUSTRIES

Weave Accent

- Maintenance

step by step



select cleaner
plan to clean
clean

1

selection

2

planning

3

cleaning

spots & spills

4

shaw contract group

step

1

Selection

The starting point of a successful maintenance program is selecting a product that meets your specific performance requirements. No single factor dictates carpet performance; there are several qualities that should be considered (see reverse side).

Overall, it is important to understand that the performance requirements of the carpet must reflect the performance needs of the space. Your Shaw Contract Group sales representative will help guide you in selecting the best product for your environment.

Additionally, the warranty of the product should ensure that your investment is protected. The manufacturer should maintain accountability for the entire carpet system — from the engineering of the backing to the fiber (with actual carpet construction).

LEND YOUR HELP

shawcontractgroup.com/maintenance



selection


CARPET SELECTION FACTORS:

- o Fiber type: The most common carpet fibers include nylon, polypropylene, polyester and wool. While each can be appropriate for certain applications, the performance characteristics of nylon make it the most common fiber type for commercial applications.
- o Fiber construction: Variables of fiber construction as it relates to nylon include yarn processing methods, tensile strength and denier (size of yarn). Typically, larger yarn and greater tensile strength yield better performance.
- o Dye type: Dye type refers to how color is added to the yarn. Solution dyed products may be aggressively cleaned to remove stains without damage to color, while yarn dyeing provides more color variance to hide soiling.
- o Color and pattern: The choice of color and pattern goes beyond aesthetic considerations and has a major impact on appearance retention. Darker colors and those similar to the soil common in the region, as well as multi-colored or patterned carpet, will help hide soiling.
- o Backing type: Backings provide a variety of performance attributes, including pattern match abilities, protection against delamination and edge ravel, superior tuft bind strength, moisture protection, antimicrobial properties and cushioning. Typically, performance backings with attributes appropriate to the facility's intended use are easier to maintain, provide long-term appearance retention, and offer more comprehensive warranties.
- o Installation: Just as important as selecting the right carpet is choosing qualified installers who are trained in installation methods and equipment, adhesives, floor prep, backings, and seaming methods for your product. Proper installation will ensure the performance of your carpet.
- o Maintenance: Maintenance is critical for optimum performance. Preventative maintenance, adhering to a well-planned maintenance schedule and responding quickly to any unforeseen maintenance issues are crucial in protecting your carpet investment.

step

2

Planning

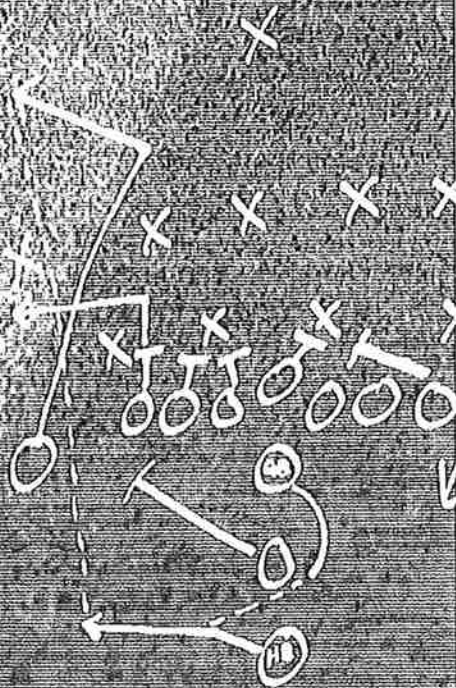

7-1-04 with assets

Planning for Performance

The carpet maintenance program should be considered part of the buying decision. If proper maintenance is neglected, the carpet appearance will suffer, shortening its useful life and increasing long-term costs. Preventative maintenance and developing a maintenance schedule are the two primary ingredients of performance planning. See the reverse side for guidelines on both.

FOR MORE PLANNING INFORMATION:

shawcontractgroup.com/maintenance



o Preventative maintenance: Prevent soil from entering and spreading throughout the building to prolong the life of your carpet and reduce overall maintenance needs. Industry estimates show that removing one pound of soil can cost more than \$800, however the measures below control soil before it enters the space:

Keep outside areas clean: By maintaining a clean exterior, dirt coming in the building will be minimized. Be sure to keep sidewalks and garages clear of dirt and debris.


Use walk-off tiles at entrances: Walk-off tiles should be placed at exterior entrances, as well as in transition areas from hard surface to carpet. Use a coarse texture tile designed to brush soil from shoes in conjunction with a water absorbent tile designed to trap moisture.

o Developing a maintenance schedule: Carpet maintenance must be established as a scheduled program, rather than a random series of infrequent cleanings and reactions to soiling conditions. Tailor the design of the program to the amount of traffic and type of soiling, both of which vary by area.

Identify traffic patterns: Assess the building layout, traffic flow and activities held within various areas to identify traffic patterns within the building. Generally, private offices will have light traffic; corridors, conference rooms and classrooms will have medium traffic; and entrances, main hallways and workrooms will have heavy traffic. Airports and entries to public spaces such as hospitals, malls and theaters are considered severe conditions.

Establish a plan: The frequency and method of cleaning should be based on the guidelines on the following page.

Step 2 planning

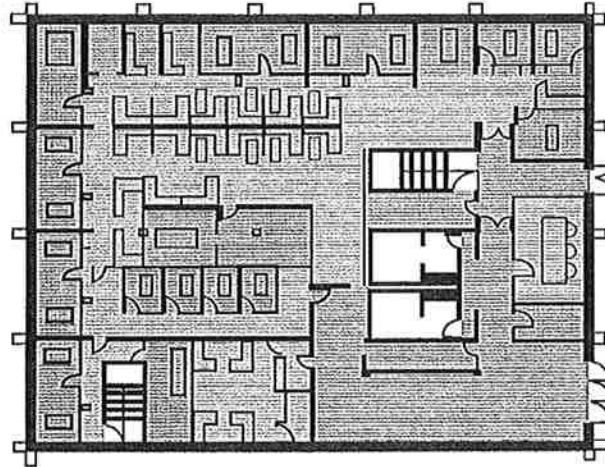

light traffic=green medium traffic=blue heavy traffic=brown

suggested frequencies by traffic levels:

TRAFFIC LEVEL	VACUUM	SPOT REMOVAL	HOT WATER EXTRACTION
light -private offices -cubicles	2+ times per week	as needed	1 time per year
medium -shared offices -interior hallways -conference rooms -classrooms	1+ times per day	as needed	2 times per year
heavy -general entrances -elevators -main hallways -breakrooms -workrooms -mail rooms -patient rooms -waiting rooms	1+ times per day	as needed	4 times per year
severe -general entrances In severe climates -cafeterias -hospital entries -(extra heavy traffic and soiling require frequent attention)	1+ times per day	as needed	12+ times per year

step

3

cleaning

With an appropriate maintenance program in place, the next steps to follow are an explanation of recommended cleaning methods, and guidelines for each, are listed on the reverse side.

FOR MORE INFORMATION, VISIT

shawcontractgroup.com/maintenance



o **Vacuum:** Vacuuming is the most important element in the maintenance of carpet and overall appearance of the facility. Vacuums are designed to remove dry soil, which accounts for 85 percent of soil tracked into a building. Frequent usage captures dirt at the surface before it settles and becomes more difficult to remove. A quality vacuum is vital to prolonging the life of your carpet. When selecting a vacuum, be sure it is certified by the Carpet and Rug Institute (CRI) Vacuum Cleaning Indoor Air Quality Program (www.carpet-rug.org).

o **Interim cleaning:** Interim cleaning may be conducted between extractions to reduce the total number of extractions and renew carpet appearance.

- **Low moisture encapsulation:** Low moisture encapsulation systems efficiently improve carpet appearance with limited down time for cleaning and drying. The cleaning agent R2Xtra, or another encapsulating cleaner certified by the Carpet and Rug Institute (CRI) Seal of Approval Program, is applied and mechanically agitated into the carpet pile, allowed to dry, then vacuumed to remove the encapsulated soil. In conjunction with scheduled hot water extraction, the low moisture method helps maintain premium carpet appearance.
- **Other interim systems:** Other methods, such as the Bonnet, provide merely a temporary appearance enhancement because they only absorb at the surface and provide no extraction of deep soil. A spinning bonnet also may damage the pile. Shaw does not recommend the Bonnet method.

o **Hot water extraction:** Hot water extraction cleans the oily materials that vacuums can't remove, which accounts for 15 percent of all soil. The frequency of hot water extraction should be defined by the maintenance schedule. If the carpet looks dull or dirty between cleanings the frequency should be increased. Proximity to areas with a high content of oily soil may require more frequent hot water extractions.

- **Steps to follow:**

1. Thoroughly vacuum all carpet.
2. Apply a traffic lane cleaner such as R2Xtra, or another cleaner certified by the CRI Seal of Approval Program (www.carpet-rug.org).
3. Agitate carpet to allow cleaner to penetrate. Allow 10 min. dwell time.
4. Extract with an extraction unit that can apply rinse water at a rate greater than one gallon per minute, with sufficient recovery power to avoid overwetting the carpet. Do not use extraction machines that recycle the water.
5. Use fans or air movers to decrease drying times.

- Do not use cleaning agents containing optical brighteners or silicon-based anti-soil treatments.
- Self-contained, walk-behind machines that apply a cleaning solution at a rate balanced with the recovery capability of the machine do not perform as well as a high-performance extractor. These machines should be used as an interim method, supplemented by periodic high-performance cleaning.

spots & spills spots

step
4



Unlike planned maintenance, spot and spill removal is the reaction to an unplanned incident and should always involve immediate action. In general, solids should be gently removed and liquids blotted with a white towel, working from the outer edge of the spill toward the center. Next, apply R2Xtra or another spotter certified by the CRI Seal of Approval Program to the stained area. Agitate with a soft bristle brush (do not scrub) and allow solution to dwell on the carpet for a minimum of 10 minutes. When dry, remove by vacuuming. Wet stains, severe stains, or bodily fluids should be removed by a portable extractor. If this does not fully remove the stain, contact a professional cleaner or follow the recommendations on the attached chart.

FOR MORE SPOT & SPILL INFORMATION:

shawcontractgroup.com/maintenance

step 4 spot & spill removal

Adhesive: Carpet	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Alcoholic Beverages	Clean with R2Xtra or another general purpose cleaner.
Asphalt	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Betadine	Clean with a sodium thiosulfate solution or streepene solution for solution dyed carpet. Follow with R2Xtra or another general purpose cleaner.
Blood	Clean with R2Xtra or another general purpose cleaner. If blood is dry, an ammonia solution may be used.
Butter	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chewing Gum	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Chocolate	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.
Coffee	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Cola	Clean with R2Xtra or another general purpose cleaner.
Cosmetics	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Crayon	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Deicer, Salt	Vacuum and blot. Then clean with R2Xtra or another general purpose cleaner.
Excrement	Blot and clean with R2Xtra or another general purpose cleaner.
Food	Clean with R2Xtra or another general purpose cleaner.
Furniture Polish	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.

step 4 spot & spill removal
 (continued)

Grease	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Ink	
• Ballpoint	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
• Permanent	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
• Washable	• Clean with R2Xtra or another general purpose cleaner.
Lipstick	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Milk	Clean with R2Xtra or another general purpose cleaner.
Mustard	Clean with R2Xtra or another general purpose cleaner.
Nail Polish	Clean with polish remover. Follow with R2Xtra or another general purpose cleaner.
Paint:	
• Latex, Wet	• Clean with R2Xtra or another general purpose cleaner.
• Latex, Dry	• Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Rust	Contact a professional.
Tea	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Toner: Copier	Vacuum, then clean with R2Xtra or another general purpose spot cleaner.
Unknown	Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Urine or Vomit	Clean with a white vinegar solution or acidic spot cleaner. Follow with R2Xtra or another general purpose cleaner.
Wax	Freeze, then shatter and vacuum. Clean with a solvent designed for grease removal. Follow with R2Xtra or another general purpose cleaner.
Wine	Clean with an ammonia solution. Follow with R2Xtra or another general purpose cleaner.

step 4 solutions

General purpose spotter	1/2 teaspoon of clear dishwashing detergent per one quart of water.
Vinegar solution	One part vinegar to one part water.
Ammonia solution	One tablespoon ammonia to one cup of water.
Solvent for grease	NEVER APPLY DIRECTLY TO CARPET. Apply solvent cleaner to towel and then remove spot from carpet.

shaw contract group

www.shawcontractgroup.com

© 2005 Shaw, a Berkshire Hathaway Company.
Printed on 100% recycled paper with soy ink.



